



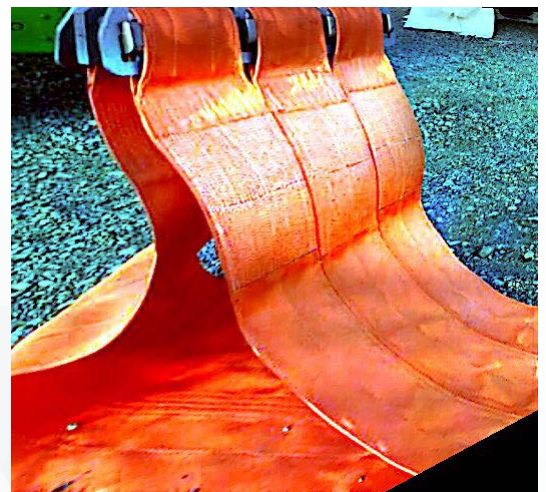

## LOWERING IN BELTS

- High quality and durable nylon webbing for durability and strength
- Alloy steel for lightweight, durable and long lasting products
- Two coats and prime paint
- Custom belts available for pipe any diameters
- Lowering-in belt and head iron sold separately

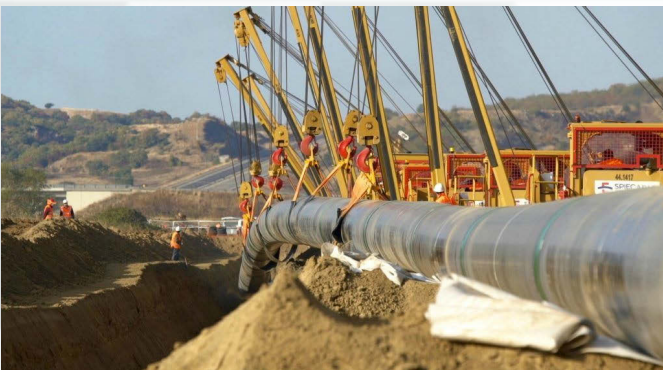

PHYSICAL PROPERTIES

Model	Pipe Diameter		Belt Width		Belt Length		Capacity	
	Inches	mm	Inches	mm	Inches	meter	lbs	tons
<b>D-PLB 12</b>	<b>12"</b>	<b>305</b>	9	<b>230</b>	78,74	<b>2</b>	44092	<b>20</b>
<b>D-PLB 16</b>	<b>16"</b>	<b>406</b>	9	<b>230</b>	78,74	<b>2</b>	44092	<b>20</b>
<b>D-PLB 18</b>	<b>18"</b>	<b>457</b>	9	<b>230</b>	78,74	<b>2</b>	44092	<b>20</b>
<b>D-PLB 20</b>	<b>20"</b>	<b>508</b>	18,11	<b>460</b>	78,74	<b>2</b>	88184	<b>40</b>
<b>D-PLB 24</b>	<b>24"</b>	<b>610</b>	18,11	<b>460</b>	118,11	<b>3</b>	88184	<b>40</b>
<b>D-PLB 30</b>	<b>30"</b>	<b>762</b>	18,11	<b>460</b>	118,11	<b>3</b>	88184	<b>40</b>
<b>D-PLB 36</b>	<b>36"</b>	<b>914</b>	27,16	<b>690</b>	157,48	<b>4</b>	132276	<b>60</b>
<b>D-PLB 42</b>	<b>42"</b>	<b>1067</b>	27,16	<b>690</b>	157,48	<b>4</b>	132276	<b>60</b>
<b>D-PLB 48</b>	<b>48"</b>	<b>1219</b>	36,22	<b>920</b>	196,85	<b>5</b>	154322	<b>70</b>
<b>D-PLB 52</b>	<b>52"</b>	<b>1320</b>	36,22	<b>920</b>	196,85	<b>5</b>	154322	<b>70</b>
<b>D-PLB 56</b>	<b>56"</b>	<b>1422</b>	36,22	<b>920</b>	236,22	<b>6</b>	198414	<b>90</b>
<b>D-PLB 60</b>	<b>60"</b>	<b>1524</b>	36,22	<b>920</b>	236,22	<b>6</b>	198414	<b>90</b>

- 6 to 1 design factor standard
- 7 to 1 design factors available upon request
- Pipe sizes and lengths not listed available on special request

Designed to meet or exceed: ASME B30.9 Slings, AWS D14.1 Welding Procedures

## HOOKS IRON HEAD



- Used to suspend lowering-in belts
- Alloy steel bail for greater strength with less weight
- Two coats and primed paint
- Aluminium Data Plate
- Easy release hooks on one side

## MECHANICAL PROPERTIES

Thickness	25 mm
Tensile Strength (MPa)	Min %4
Elongation (MPa)	Min 420
Yield Strenght (Mpa)	Min 580
Tensile (MPa)	14,5
Angle Tear Strength (DIE C (kN/m)	85
Trouser Tear Strength (DIE C (kN/m)	-
Elongation (%)	420
Resilience (%)	55
Abrasion (mm <sup>3</sup> )	55
Density (g/cm <sup>3</sup> )	7,80
Compression Set (22 hrs at 70°C) (%)	30

## STEEL LIFTING HEAD

NUMBER OF HOOKS	FRAME WIDE (mm)	FRAME THICKNESS (mm)	FRAME MATERIAL	HOOK THICKNESS (mm)	HANGER THICKNESS (mm)	HOOK/HANGER MATERIAL
2	530	20	S355JR	15	15	S355JR
3	600	20	S355JR	15	15	S355JR
4	1000	30	S355JR	25	15	S355JR
5	1300	30	S355JR	25	15	S355JR
6	1600	30	S355JR	25	15	S355JR

\*Dimensions can be changed optionally.